




 *Masonite*[®]

ARTEK[®] SMOOTH FIBERGLASS DOOR COLLECTION

ArTek® Smooth Fiberglass Entry Systems

Adding richness and significance to a home's exterior is the ArTek® advantage. The incredibly smooth fiberglass surface and variety of decorative glass options transform an entryway and enhance the value of any home.

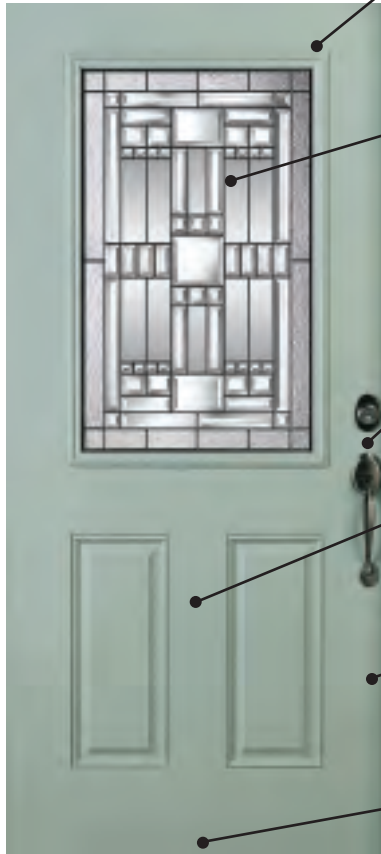

High-Performance Fiberglass Facings

Specially engineered fiberglass door facings provide maximum protection and durability. ArTek® will not dent and resists splitting, cracking and warping. ArTek replicates the appearance of a wood door with stile and rail detail while providing an extra smooth surface for finishing.

Specialty™ Glass Inserts

All Specialty™ decorative glass inserts feature a triple-pane 1" insulated assembly providing maximum design selection and performance. Double-pane insulated glass inserts and flush-glazed frame designs are also available.

Internal Blocking

Lock area is reinforced with a lock block to provide a solid mounting surface for decorative hardware.

Polyurethane Core

Rigid polyurethane foam, meeting strict environmental guidelines, provides maximum thermal protection and dimensional stability.

Engineered Stiles

Hinge and lock stiles feature laminated lumber providing excellent dimensional stability.

Rot-Resistant Bottom Rail

A high-performance, composite material is utilized on all ArTek bottom rails, giving excellent rot-resistance.



True Square-Edge Design

The square-edge design of ArTek offers an attractive wood door appearance and permits easy field machining.

High-Definition Panel Profile

ArTek features a high-definition, patented panel profile providing excellent shadow lines and distinct panel designs.

NOTE: Glass lites shown are Specialty™ Glass



Top Left: ArTek with Seville glass, Door: ATK-105-841, Sidelites: ATKSL-200-841
 Bottom Left: ArTek with Marquise glass, Door: 8'0" ATK-404-778, Sidelites: 8'0" ATKSL-450-778, Transom: C-646
 Center: ArTek with Seville glass, Door: ATK-106-841

Top Right: ArTek with Monaco glass, Door: ATK-106-315, Sidelites: ATKSL-129-315, Transom: T-315
 Bottom Right: ArTek with Nassau glass, Door: 8'0" ATK-404-871, Sidelites: 8'0" ATKSL-450-871, Transom: C-871

Width x Height	FLUSH	BLANK TOP 4-PANEL	NEW ENGLAND 4-PANEL	6-PANEL	FLUSH SIDELITE	1-PANEL SIDELITE
2'0" x 6'8"	■ 🔥					
2'0" x 7'0"	■ 🔥					
2'0" x 8'0"	■					
2'6" x 6'8"	■ 🔥					
2'6" x 7'0"	■ 🔥					
2'6" x 8'0"	■					
2'8" x 6'8"	■ 🔥	■	■ 🔥	■ 🔥		
2'8" x 7'0"	■ 🔥		■ 🔥	■ 🔥		
2'8" x 8'0"	■			■		
2'10" x 6'8"	■ 🔥	■	■ 🔥	■ 🔥		
2'10" x 7'0"	■ 🔥		■ 🔥	■ 🔥		
2'10" x 8'0"	■			■		
3'0" x 6'8"	■ 🔥	■	■ 🔥	■ 🔥		
3'0" x 7'0"	■ 🔥		■ 🔥	■ 🔥		
3'0" x 8'0"	■			■		
1'0" x 6'8"					■ ○	■ ○
1'0" x 7'0"					■ ○	■ ○
1'0" x 8'0"					■ ○	■ ○
1'2" x 6'8"					■	■
1'2" x 7'0"					■	■
1'2" x 8'0"					■	■

Notes: ○ 10" x 6'8", 7'0" or 8'0" sidelite available

🔥 Available as 20-minute Warnock Hersey® listed fire doors (fire doors feature an engineered solid core)

- Positive Pressure per UBC 7-2 (1997) and UL 10(c)
- Intumescent edge-seal required for Positive Pressure
- Neutral Pressure per UBC 7-2 (1994) and UL 10(b)
- Rated for single openings up to 3'0" x 7'0"

ArTek® Flush-Glazed Doors



Richness and Light

Flush-glazing makes a significant difference in opening up a home's entryway by bringing more light inside. PREMVU® Flush-Glazed Door Panels improve the overall feel of a home's interior through additional natural lighting.

Special Features:

- **Superior aesthetics**
The flush-glazed feature of PREMVU provides a much cleaner appearance than the traditional glass insert. The glazing bead is flush with the surface of the door and does not have screw holes.
- **Engineered durability**
PREMVU ArTek Flush-Glazed Doors incorporate cutting-edge fiberglass technology into an exceptionally dent-proof and weather-resistant door.
- **Wider viewing area**
PREMVU brightens up any room with 20% more viewing area – standard and wide glass inserts are available.
- **Durable and energy efficient**
All PREMVU ArTek Flush-Glazed Doors are manufactured with fiberglass facings and polyurethane foam cores – maximizing strength, durability and energy efficiency.

Factory Glazed Options:



1-lite Clear and
1-lite Low-E Clear
Insulated Glass
6'8" or 8'0"



1-lite
Internal Mini-Blind
6'8"



15-lite
White Internal Grille
6'8"



18-lite
White Internal Grille
8'0"



PREMVU® Series ArTek® Flush-Glazed Doors:

Glass Widths	Door Panel (width x height)									
	2'0" x 6'8"	2'0" x 8'0"	2'6" x 6'8"	2'6" x 8'0"	2'8" x 6'8"	2'8" x 8'0"	2'10" x 6'8"	2'10" x 8'0"	3'0" x 6'8"	3'0" x 8'0"
14"	■**	■**								
20"			■	■*	■	■*				
22"					■	■*	■	■*	■	■*
26"									■	■*

Notes: *Internal mini-blinds are NOT available. *Low-E NOT available.
PREMVU Door Panels are also available "open" (no glass) with stops available for 1" insulated glass insert.


Masonite International Corporation

Masonite Helpline: **1-800-663-DOOR (1-800-663-3667)**
 9 a.m. to 9 p.m. Monday through Saturday, 10 a.m. to 4 p.m. Sunday, EST
www.masonite.com

Masonite, PREMVU and ArTek are registered trademarks of Masonite International Corporation.
 Specialty is a trademark of Specialty Building Products, Inc. Warnock Hersey is a registered trademark of Intertek Testing Services.
 * Please check with your Masonite dealer or distributor for current warranty terms and conditions.
 Our continuing program of product improvement makes specification, design and product detail subject to change without notice.