




▲ Door: MWS-404-871, Sidelites: MWSSL-450-871, Transom: C-871

## *Masonite® Wood-Edge Steel Doors*

The combination of 24-gauge steel facings, a full perimeter wood thermal break, and a high performance polyurethane core guarantees energy efficiency and solid construction. Masonite's wide range of panel designs provide an incredible selection.

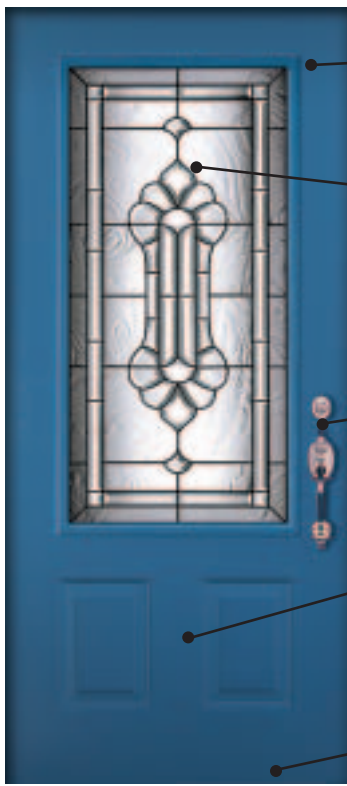

**Premium Steel Facings**

Prime coated, galvanized, 24-gauge, steel facings provide excellent corrosion protection. 26-gauge utility doors are available on select styles (limited 1-year warranty).

**Specialty™ Glass Inserts**

All decorative glass inserts feature a triple-pane 1" insulated assembly providing maximum design selection and performance. Double-pane insulated glass inserts and flush-glazed frame designs are also available.

**Hardware Reinforcement**

Reinforcement is added to the lock area providing a rigid mounting surface.

**Polyurethane Core**

Rigid polyurethane foam, meeting strict environmental guidelines, provides maximum thermal protection and dimensional stability. Sidelite panels feature expanded polystyrene cores.


**Rot-Resistant Bottom Rail**

An engineered composite material or steel is used at the bottom of every Masonite Wood-Edge Steel door providing excellent protection.



**Wood-Edge Construction**

Hinge and lock stiles feature finger-jointed wood providing excellent stability, easy field machining, and a full 1-3/4" thermal barrier.

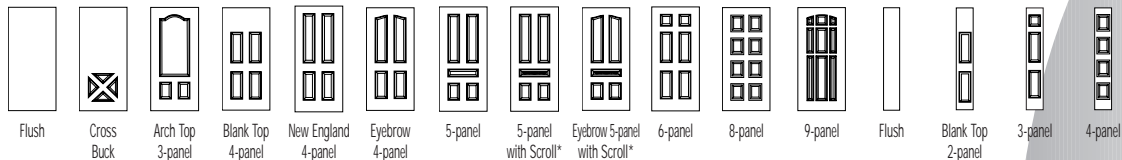

Width x Height	Flush	Cross Buck	Arch Top 3-panel	Blank Top 4-panel	New England 4-panel	Eyebrow 4-panel	5-panel	5-panel with Scroll*	Eyebrow 5-panel with Scroll*	6-panel	8-panel	9-panel	Flush	Blank Top 2-panel	3-panel	4-panel
2'0" x 6'8"	■●🔥															
2'0" x 7'0"	■															
2'0" x 8'0"	■															
2'6" x 6'8"	■●🔥			■●¹						■●🔥						
2'6" x 7'0"	■			■¹						■¹						
2'6" x 8'0"	■															
2'8" x 6'8"	■●🔥	■	■🔥	■●	■🔥	■🔥	■🔥	■🔥	■🔥	■●🔥	■🔥	■🔥				
2'8" x 7'0"	■	■	■	■	■	■	■	■	■	■	■	■				
2'8" x 8'0"	■									■	■✓					
2'10" x 6'8"	■●🔥	■	■🔥	■●	■🔥	■🔥	■🔥	■🔥	■🔥	■●🔥	■🔥	■🔥				
2'10" x 7'0"	■	■	■	■	■	■	■	■	■	■	■	■				
2'10" x 8'0"	■									■	■✓					
3'0" x 6'8"	■●🔥	■	■🔥	■●	■🔥	■🔥	■🔥	■🔥	■🔥	■●🔥	■🔥	■🔥				
3'0" x 7'0"	■	■	■	■	■	■	■	■	■	■	■	■				
3'0" x 8'0"	■									■🔥	■✓					
1'0" x 6'8"													■○	■○	■	■
1'0" x 7'0"													■○	■○		
1'0" x 8'0"													■○	■○		■✓
1'2" x 6'8"													■	■	■	■
1'2" x 7'0"													■	■		
1'2" x 8'0"													■	■		■✓

Notes: ■ Masonite® Wood-Edge Steel availability (24-gauge, 5-year limited warranty) ● Masonite® Wood-Edge Utility Steel availability (26-gauge, 1-year limited warranty)  
 ○ 10" x 6'8", 7'0" or 8'0" sidelite available \*Available without scrolled center panel. ¹Features narrow panel layout. ✓ 10-panel door, 5-panel sidelite  
 🔥 20-minute fire door available