



THE VELUX® TRUSS SERIES

Built for speed to save you time and money



Sized for trusses, available through professional lumber and building material dealers




Fits perfectly between trusses set 24" on center

Custom Size for Fast Installation

Because most trusses are set at 24" on center with a 22½" clear opening, the Truss Skylight Series features the perfect dimensions to install fast and efficiently on a truss roof. These skylights install with the trim groove perfectly aligned to accept either ½" or ⅝" wall board, eliminating the need for additional framing or shimming before installing the wall board.


Mounting Brackets are Pre-installed for Speed

Our exclusive patented mounting brackets are pre-installed on the skylights' frame. You simply bend the brackets into mounting position, hammer the tab flat and nail them to the roof deck. There's no need to remove cladding before mounting the brackets, so this feature alone saves up to 30 minutes in installation time per skylight!

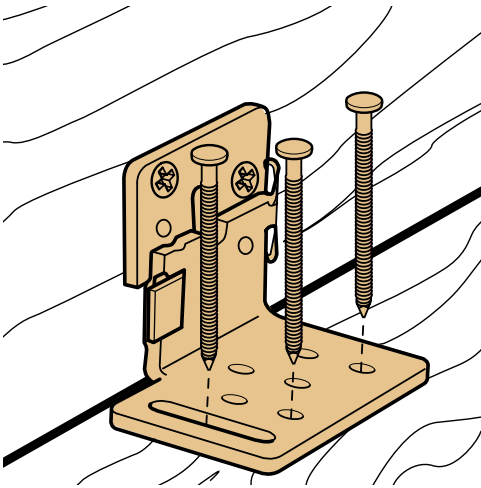

Positioning Blocks Make for Quick Alignment


Temporary positioning blocks make mounting the skylights over the roof opening fast and simple. The small wooden inserts fit snugly in the trim groove along the skylights' frame and help your roofer align it precisely in place from the roof deck. After the skylight is mounted, just remove the positioning blocks to install wall board in the trim groove.



Other Standard Features

We build these skylights better than they have to be for durability and efficiency. A choice of insulated glazings are available including Comfort™ Low-E, tempered and ComfortPlus™ Low-E, laminated. ComfortPlus is standard on the VSE. Argon gas is injected between the panes to provide additional efficiency. A paint shield is provided for the fixed units to protect the glass. The select wood frame features aluminum cladding for a maintenance-free exterior. VELUX® Type EDL® Step Flashing (for thin roofing materials), Type EDM (for metal roofing materials) and Type EDW™ Flashing (for high profile roofing materials) come ready to be installed right out of the box so you won't be bothered with having to construct your own flashing.

Typical Installation

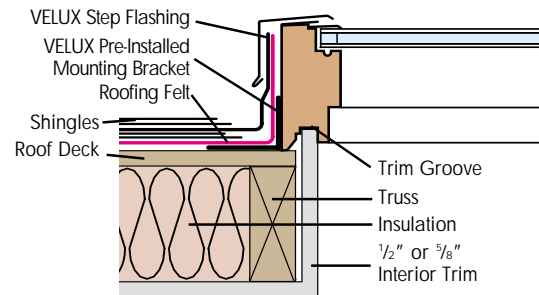

Prices effective March 1, 2003

MODELS AND SIZES:	FS 150	FS 156	VS 156	VSE 156*
Outside Frame (WxH) (in.)	23 ⁵ / ₁₆ x 23 ⁹ / ₁₆	23 ⁵ / ₁₆ x 46 ³ / ₈	23 ⁵ / ₁₆ x 46 ³ / ₈	23 ⁵ / ₁₆ x 46 ³ / ₈
Rough Opening (WxH) (in.)	22½ x 22½	22½ x 45 ⁵ / ₁₆	22½ x 45 ⁵ / ₁₆	22½ x 45 ⁵ / ₁₆
Finished Framing (WxH) (in.)	22½ x 22½	22½ x 45 ⁵ / ₁₆	22½ x 45 ⁵ / ₁₆	22½ x 45 ⁵ / ₁₆
Daylight Area (glass) (WxH) (in.)	19 ¹⁵ / ₁₆ x 20 ¹ / ₈	19 ¹⁵ / ₁₆ x 42 ⁵ / ₁₆	18½ x 39 ³ / ₄	18½ x 39 ³ / ₄
Daylight Area (Sq. Ft.)	2.78	5.94	5.11	5.11
Net Weight Comfort (Lbs.) (VSE: ComfortPlus)	29	48	58	63
PRICING INFORMATION:				
Comfort™ Tempered, Low-E, Argon Gas Filled	\$126	\$161	\$335	N/A
ComfortPlus™ Low-E, Laminated, Argon Gas Filled	\$142	\$192	\$363	\$698
Step Flashing (EDL)	\$45	\$54	\$54	\$54
High Profile Flashing (EDW)	\$83	\$97	\$97	\$97
Metal Roof Flashing (EDM)	\$160	\$183	\$183	\$183 [†]
Venetian Blind Manual/Electric [†]	\$76/\$202 [†]	\$88/\$212 [†]	\$88	\$212
LightBlock Shade Electric	\$233	\$245	N/A	\$245
Cellular Shade Manual/Electric [†]	\$95/\$244 [†]	\$110/\$256 [†]	\$110	\$256 [†]
HeatBlock Awning Electric	\$284	\$294	\$294	\$294

Note: The finished framing dimensions are based on perpendicular interior finish material on all four sides.

*VSE and blind are electric

VELUX America Inc.

Toll-Free Phone: 1-800-88-VELUX

Fax: 864-943-2631